

## KEY FEATURES

- 100 W program power above 1,5 kHz
- High sensitivity: 107 dB (1W / 1m)
- Extended frequency range: 0,8 - 18 kHz
- Low harmonic distortion
- 1,75" edgewound aluminium ribbon voice coil
- Polyester diaphragm
- 80° x 60° horn
- Ferrite magnet
- Designed for compact cabinets



## TECHNICAL SPECIFICATIONS

Nominal diameter	25,4 mm	1 in
Rated impedance		8 Ω
Minimum impedance		5 Ω
D.C. resistance		4,3 Ω
Power capacity <sup>1</sup>	50 W <sub>AES</sub> above 1,5 kHz	
Program power <sup>2</sup>	100 W above 1,5 kHz	
Sensitivity <sup>3</sup>	107 dB	1W / 1m @ Z <sub>N</sub>


Frequency range	0,8 - 18 kHz	
Recommended crossover	1,5 kHz or higher (12 dB/oct min.)	
Voice coil diameter	44,4 mm	1,75 in
Magnetic assembly weight	1,2 kg	2,9 lb
Flux density	1,65 T	
BI factor	8,5 N/A	

### Notes:

<sup>1</sup> The power capacity is determined according to AES2-1984 (r2003) standard.

<sup>2</sup> Program power is defined as the transducer's ability to handle normal music program material.

<sup>3</sup> Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz

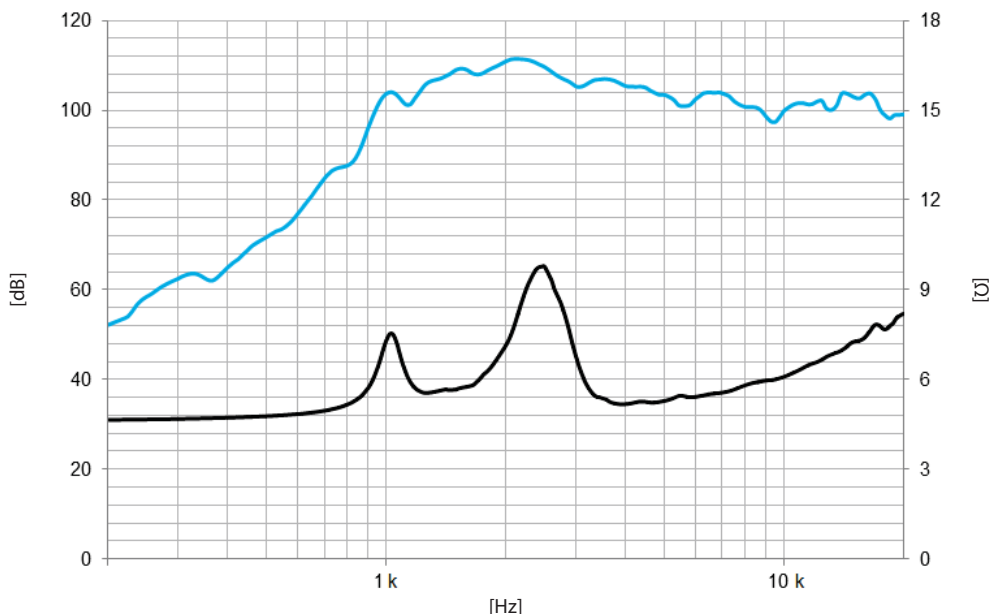

Note: On axis frequency response measured in anechoic chamber, 1W / 1m

## MOUNTING INFORMATION

Overall dimensions	140 x 140 mm	5,5 x 5,5 in
Cutout dimensions	129 x 112 mm	5,1 x 4,4 in
Depth	122 mm	4,8 in
Net weight	1,5 kg	3,3 lb
Shipping weight	1,7 kg	3,7 lb

## DIMENSION DRAWING

